




Part Number: **FS-184060-2**

Revision: 2023-Dec-06

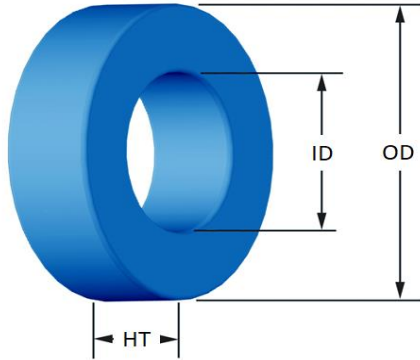

(If coated, Max./Min. includes coating)

	mm	in
<b>OD</b>	(nom. - bare core) 46.74 (max.) 47.63	1.840 1.875
<b>ID</b>	(nom. - bare core) 24.13 (min.) 23.32	0.950 0.918
<b>HT</b>	(nom. - bare core) 18.03 (max.) 18.92	0.710 0.745
<b>Mass</b>	(approximate)	150 grams
<b>Magnetic Dimensions</b>	$A_e$ - Eff. Mag. Cross Section	1.99 cm <sup>2</sup>
	$L_e$ - Eff. Mag. Path Length	10.743 cm
	$V_e$ - Eff. Core Volume	21.4 cm <sup>3</sup>
	$W_A$ - Min. Eff. Window Area	4.27 cm <sup>2</sup>
	$s_a$ - Surface Area	81.7 cm <sup>2</sup>
	$m_{lt}$ - mean length per turn	7.38 cm
<b>Inductance</b>	$\mu_i$ (reference)	60
	$A_L$ value (nominal)	135 nH/N <sup>2</sup>
	Test Winding	70 Turns AWG# 20
	Frequency	10k Hz
	Voltage on Agilent 4284A	0.62 V
AL tolerance	±8%	
<b>Core Loss</b>	$\text{Core Loss (mW/cm}^3\text{)} = \frac{a}{B_{pk}^3} + \frac{b}{B_{pk}^{2.3}} + \frac{c}{B_{pk}^{1.65}} + d \cdot B_{pk}^2 \cdot f^2$	
	where $B_{pk}$ expressed in gauss, $f$ expressed in hertz, and: $a=1.000E+06$ , $b=3.903E+08$ , $c=3.785E+06$ , $d=5.229E-14$	
	$B_{pk}$	1000 G
	frequency	50 k Hz
	Core Loss (nominal)	676 mW/cm <sup>3</sup>
Core Loss (maximum)	778 mW/cm <sup>3</sup>	
<b>DC Saturation</b>	$\% \mu_i = \frac{1}{a + b \cdot H^c} + d$	
	where H expressed in oersteds, and: $a=1.000E-02$ , $b=1.949E-07$ , $c=2.099$ , $d=0.000$	
	$H_{DC}$	150 Oe
	Percent Initial Perm(nom.)	58.1 %
Percent Initial Perm(min.)	48.6 %	
<b>Coating/Pkg</b>	Coating Type:	Blue Epoxy
	Voltage Breakdown (min.)	1000 Vrms
	Limit	0.1 mA, 5 s
	Package Quantity	80 Pcs/Box

Winding Table	Wire Size	AWG	8	10	12	14	16	18	20	22	24	26	28
		mm	3.150	2.500	2.000	1.600	1.250	1.000	0.800	0.630	0.500	0.400	0.315
	Single Layer	Turns	17	22	28	35	45	56	70	88	111	138	173
		Rdc(Ω)	2.6 m	5.3 m	10.7 m	21.4 m	43.7 m	86.5 m	171.9 m	343.7 m	689.5 m	1.4	2.7
Full Winding	Turns	22	35	54	83	128	199	307	476	736	1,139	1,764	
	Rdc(Ω)	3.3 m	8.4 m	20.7 m	50.7 m	124.3 m	307.3 m	753.9 m	1.9	4.6	11.3	27.7	

