




**Part Number:** **MS-141125-2**

Revision 2021-Dec-01 - Generated 2021-Dec-01

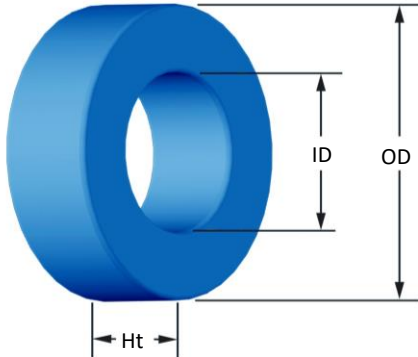

(If coated, Max./Min. includes coating)

<b>OD</b>	(nom. - bare core) (max.)	35.81 mm 36.63 mm	1.410 in 1.442 in
<b>ID</b>	(nom. - bare core) (min.)	22.35 mm 21.54 mm	0.880 in 0.848 in
<b>HT</b>	(nom. - bare core) (max.)	10.46 mm 11.28 mm	0.412 in 0.444 in
<b>Mass</b>	(approximate)	36 grams	
<b>Magnetic Dimensions</b>	A <sub>e</sub> - Eff. Mag. Cross Section	0.678 cm <sup>2</sup>	
	L <sub>e</sub> - Eff. Mag. Path Length	8.98 cm	
	V <sub>e</sub> - Eff. Core Volume	6.09 cm <sup>3</sup>	
	WA - Min. Eff. Window Area	3.64 cm <sup>2</sup>	
	sa - Surface Area	45.6 cm <sup>2</sup>	
<b>Inductance</b>	μ <sub>i</sub> (reference)	125	
	A <sub>L</sub> value (nominal)	117 nH/N <sup>2</sup>	
	Test Winding	N=80, #22 AWG	
	Frequency	10 kHz	
	Voltage on Agilent 4284A	0.24 V	
<b>Core Loss</b>	AL tolerance	±8%	
<b>DC Saturation</b>	$\frac{f}{Bpk^3 + \frac{b}{Bpk^{2.3}} + \frac{c}{Bpk^{1.65}}} + d \cdot Bpk^2 \cdot f^2$		
	where B <sub>pk</sub> expressed in gauss, f expressed in hertz, and: a=1.394E+10, b=1.034E+09, c=1.244E+07, d=4.007E-14		
	B <sub>pk</sub>	1000 G	
	frequency	50 kHz	
	Core Loss (nominal)	276 mW/cm <sup>3</sup>	
<b>Coating/Pkg</b>	Core Loss (maximum)	318 mW/cm <sup>3</sup>	
	$\% \mu_i = \frac{1}{a + b \cdot H^c} + d$		
	where H expressed in oersteds, and: a=1.000E-02, b=7.884E-06, c=1.883, d=0.000		
	H <sub>DC</sub>	40 Oe	
	Percent Initial Perm(nom.)	55.0%	
<b>Winding Table</b>	Percent Initial Perm(min.)	46.4%	
	Coating Type:	Blue Epoxy	
	Voltage Breakdown (min.)	1000 Vrms	
	Limit	0.1 mA, 5 s	
Package Quantity	343 Pcs/Box		

Wire Size	AWG	8	10	12	14	16	18	20	22	24	26	28
	mm	3.150	2.500	2.000	1.600	1.250	1.000	0.800	0.630	0.500	0.400	0.315
Single Layer	Turns	15	20	25	32	41	52	65	81	102	128	159
	Rdc(Ω)	1.5 m	3.2 m	6.3 m	12.8 m	26.1 m	52.7 m	104.7 m	207.5 m	415.6 m	829.5 m	1.6
Full Winding	Turns	19	30	46	71	109	169	262	406	628	972	1,505
	Rdc(Ω)	1.9 m	4.8 m	11.6 m	28.4 m	69.4 m	171.2 m	422.1 m	1.0	2.6	6.3	15.5

