




Part Number: **FS-130060-2**

Revision: 2023-Dec-06

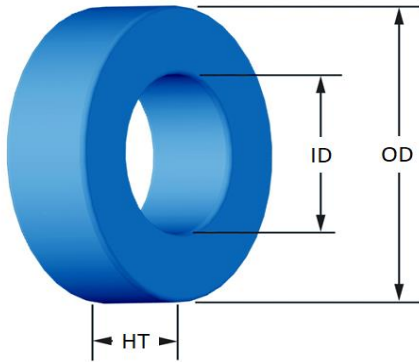

(If coated, Max./Min. includes coating)		mm	in
OD	(nom. - bare core)	33.02	1.300
	(max.)	33.83	1.332
ID	(nom. - bare core)	19.94	0.785
	(min.)	19.30	0.760
HT	(nom. - bare core)	10.67	0.420
	(max.)	11.61	0.457
Mass	(approximate)	37	grams
Magnetic Dimensions	A_e - Eff. Mag. Cross Section	0.672	cm ²
	L_e - Eff. Mag. Path Length	8.15	cm
	V_e - Eff. Core Volume	5.48	cm ³
	W_A - Min. Eff. Window Area	2.93	cm ²
	s_a - Surface Area	40.1	cm ²
	m_{lt} - mean length per turn	4.74	cm
Inductance	μ_i (reference)	60	
	A_L value (nominal)	61	nH/N ²
	Test Winding	70 Turns	AWG# 22
	Frequency	10k	Hz
	Voltage on Agilent 4284A	0.21	V
AL tolerance	±8%		
Core Loss	$\text{Core Loss (mW/cm}^3\text{)} = \frac{a}{B_{pk}^3} + \frac{b}{B_{pk}^{2.3}} + \frac{c}{B_{pk}^{1.65}} + d \cdot B_{pk}^2 \cdot f^2$		
	where B_{pk} expressed in gauss, f expressed in hertz, and: $a=1.000E+06$, $b=3.903E+08$, $c=3.785E+06$, $d=5.229E-14$		
	B_{pk}	1000	G
	frequency	50 k	Hz
	Core Loss (nominal)	676	mW/cm ³
Core Loss (maximum)	778	mW/cm ³	
DC Saturation	$\% \mu_i = \frac{1}{a + b \cdot H^c} + d$		
	where H expressed in oersteds, and: $a=1.000E-02$, $b=1.949E-07$, $c=2.099$, $d=0.000$		
	H_{DC}	150	Oe
	Percent Initial Perm(nom.)	58.1	%
Percent Initial Perm(min.)	48.6	%	
Coating/Pkg	Coating Type:	Blue Epoxy	
	Voltage Breakdown (min.)	1000 Vrms	
	Limit	0.1 mA, 5 s	
	Package Quantity	336 Pcs/Box	

Winding Table	Wire Size	AWG	8	10	12	14	16	18	20	22	24	26	28
		mm	3.150	2.500	2.000	1.600	1.250	1.000	0.800	0.630	0.500	0.400	0.315
	Single Layer	Turns	14	18	22	29	36	46	58	73	91	114	142
		Rdc(Ω)	1.4 m	2.8 m	5.4 m	11.4 m	22.4 m	45.6 m	91.5 m	183.1 m	363.0 m	723.2 m	1.4
Full Winding	Turns	15	24	37	57	88	136	211	326	504	780	1,208	
	Rdc(Ω)	1.5 m	3.7 m	9.1 m	22.3 m	54.9 m	134.9 m	332.8 m	817.6 m	2.0	4.9	12.2	

