




Part Number: **GX-106060-2**

Revision: 2023-Dec-06

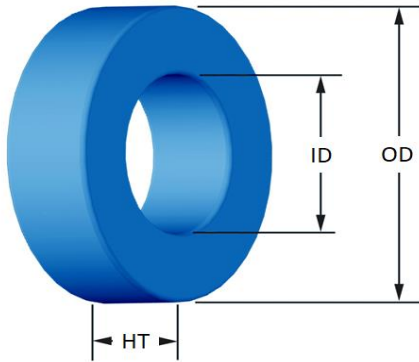

(If coated, Max./Min. includes coating)

	mm	in
OD	(nom. - bare core) 26.92 (max.) 27.69	1.060 1.090
ID	(nom. - bare core) 14.73 (min.) 14.10	0.580 0.555
HT	(nom. - bare core) 11.18 (max.) 11.99	0.440 0.472

Mass	(approximate)	31	grams
Magnetic Dimensions	A_e - Eff. Mag. Cross Section	0.654	cm ²
	L_e - Eff. Mag. Path Length	6.35	cm
	V_e - Eff. Core Volume	4.15	cm ³
	W_A - Min. Eff. Window Area	1.56	cm ²
	s_a - Surface Area	28.8	cm ²
	m_{lt} - mean length per turn	4.46	cm

Inductance	μ_i (reference)	60	
	A_L value (nominal)	75	nH/N ²
	Test Winding	80 Turns	AWG# 26
	Frequency	10k	Hz
	Voltage on Agilent 4284A	0.23	V
AL tolerance	±8%		

Core Loss	$\text{Core Loss (mW/cm}^3\text{)} = \frac{a}{B_{pk}^3} + \frac{b}{B_{pk}^{2.3}} + \frac{c}{B_{pk}^{1.65}} + d \cdot B_{pk}^2 \cdot f^2$		
	where B_{pk} expressed in gauss, f expressed in hertz, and: $a=7.314E+06$, $b=1.490E+09$, $c=2.002E+06$, $d=6.519E-15$		
	B_{pk}	1000	G
	frequency	50 k	Hz
	Core Loss (nominal)	254	mW/cm ³
Core Loss (maximum)	292	mW/cm ³	

DC Saturation	$\% \mu_i = \frac{1}{a + b \cdot H^c} + d$	
	where H expressed in oersteds, and: $a=1.000E-02$, $b=3.174E-08$, $c=2.441$, $d=0.000$	
	H_{DC}	150 Oe
	Percent Initial Perm(nom.)	60.6 %
Percent Initial Perm(min.)	49.7 %	

Coating/Pkg	Coating Type:	Blue Epoxy
	Voltage Breakdown (min.)	1000 Vrms
	Limit	0.1 mA, 5 s
	Package Quantity	504 Pcs/Box

Winding Table	Wire Size	AWG	10	12	14	16	18	20	22	24	26	28	30
		mm	2.500	2.000	1.600	1.250	1.000	0.800	0.630	0.500	0.400	0.315	0.250
	Single Layer	Turns	12	16	20	26	33	41	52	66	82	103	129
		Rdc(Ω)	1.8 m	3.7 m	7.4 m	15.3 m	30.8 m	60.9 m	122.8 m	247.8 m	489.7 m	978.2 m	1.9
Full Winding	Turns	13	20	30	47	73	112	174	269	417	645	998	
	Rdc(Ω)	1.9 m	4.6 m	11.1 m	27.6 m	68.1 m	166.3 m	410.8 m	1.0	2.5	6.1	15.1	

